



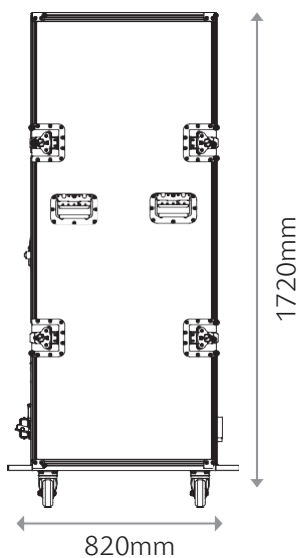

+

Kepler Drive 22kW

For movement and flying of scenic pieces and performers. Features dual brakes and double encoder capabilities. Connection via the QNetwork Global Extension cable saves installation time and is easily expandable for added axes.

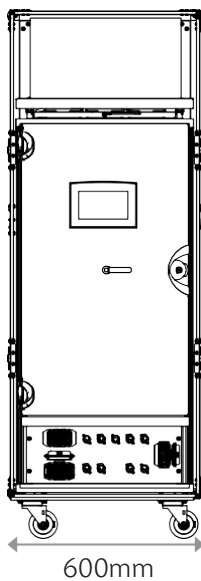

Drive Model	Kepler22S/22A
--------------------	---------------

Variants

Servo	•
Asynchronous	•

Physical

Height	1720mm
Width	600mm
Depth	820mm
Weight	175kg

Electrical Input

Supply Voltage	380-415VAC 3ph+N+E, 50-60Hz
Supply Current (@400V)	63A

Electrical Output

Motor Voltage	415VAC 3ph+E, 50-60Hz
Rated Current (@400V)	46A
Auxiliary Output	230V, 16A

Brakes

Primary Brake	230V
Secondary Brake	230V

Encoder Input

Primary	Hyperface, Resolver
Secondary	Incremental, 1024CPR

Connections

Local Network	Global QNetwork Cable
Winch Motor/Brake	Modular, QMotion Spec
Winch Feedback	Modular, QMotion Spec
Other	Manual Pendant, Loadcell, CAN Sync, Local Deadman

Motion Controller Variants

QPOS	•
EtherCAT	• •